





RAPID PREP

DH15000 DESICCANT DEHUMIDIFIER

This unit is a reliable solution for abrasive blasting in humidity. Desiccant air-supply units provide low-humidity conditions necessary to maintain a dry environment. The solid desiccant adsorbs moisture from process air. The moisture is taken out by a second and separate reactivating airstream. This process enables the rotor to continually take moisture out of the airstream without interruption.

MODEL	CFM	FUEL TYPE	"A" Dim.	"B" Dim.	"C" Dim.	WEIGHT
DDH-15000	15,000	Electric	18'.5"	7' 3"	8' 10"	10,000 lbs

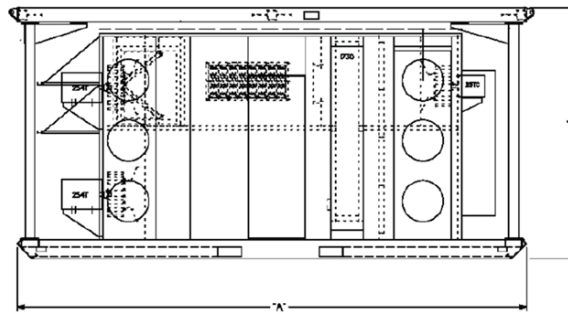

- Simple maintenance
- Very dry air can be achieved

Model	Static Pressure External	Moisture Removal Lbs/Hr 80°/ 60% RH	Moisture Removal Gallons/Day 80°/ 60% RH	Moisture Removal Lbs/Hr 55°/ 80% RH	Moisture Removal Gallons/Day 55°/ 80% RH	Moisture Removal Lbs/Hr 40°/ 80% RH	Moisture Removal Gallons/Day 40°/ 80% RH
DH15000	2.0	424	1,221	335	1,022	242	697

Model	Air Volume	Electric Reactivation Load 230/1/60	Electric Reactivation FLA Load 460/3/60	Gallon/HR Max Usage LP
DH15000	15,000	N/A	335	12.7