




## RAPID PREP

### DH5000 DESICCANT DEHUMIDIFIER

This unit is a reliable solution for abrasive blasting in humidity. Desiccant air-supply units provide low-humidity conditions necessary to maintain a dry environment. The solid desiccant adsorbs moisture from process air. The moisture is taken out by a second and separate reactivating airstream. This process enables the rotor to continually take moisture out of the airstream without interruption.

<b>MODEL</b>	<b>CFM</b>	<b>FUEL TYPE</b>	<b>"A" Dim.</b>	<b>"B" Dim.</b>	<b>"C" Dim.</b>	<b>WEIGHT*</b>
DDH-5000	5,000	Electric	14' 2"	4' 1"	6' 7"	5,400 lbs

\*Weight includes lifting cage

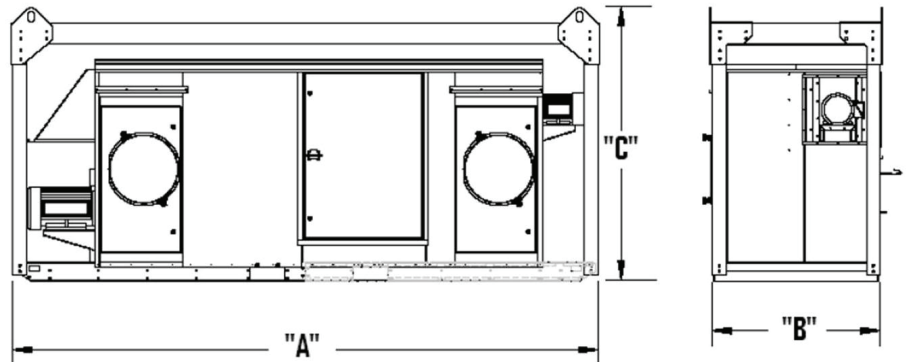

- Simple maintenance
- Very dry air can be achieved

Model	Static Pressure External	Moisture Removal Lbs/Hr 80°/ 60% RH	Moisture Removal Gallons/Day 80°/ 60% RH	Moisture Removal Lbs/Hr 55°/ 80% RH	Moisture Removal Gallons/Day 55°/ 80% RH	Moisture Removal Lbs/Hr 40°/ 80% RH	Moisture Removal Gallons/Day 40°/ 80% RH
DDH-5000	2.0	136	392	115	331	75	216

Model	Air Volume	Electric Reactivation Load 230/1/60	Electric Reactivation FLA Load 460/3/60	Gallon/HR Max Usage LP
DDH-5000	5,000	N/A	138	4.4