





RAPID PREP

DH3000 DESICCANT DEHUMIDIFIER

This unit is a reliable solution for abrasive blasting in humidity. Desiccant air-supply units provide low-humidity conditions necessary to maintain a dry environment. The solid desiccant adsorbs moisture from process air. The moisture is taken out by a second and separate reactivating airstream. This process enables the rotor to continually take moisture out of the airstream without interruption.

MODEL	CFM	FUEL TYPE	"A" Dim.	"B" Dim.	"C" Dim.	WEIGHT
DDH-3000	3,000	Electric	7' 3"*	4' 6"*	34.25"*	1,200 lbs**

*Measurements include casters attached (see below for measurements without casters.) **Weight is estimated at this time.

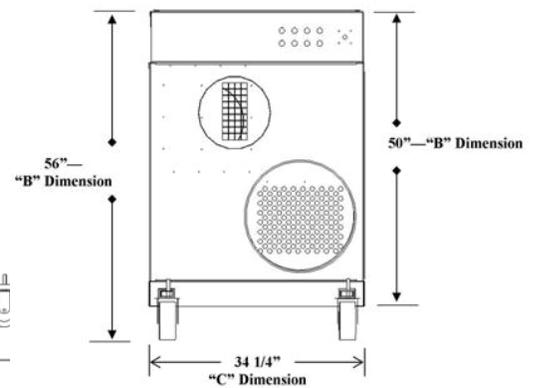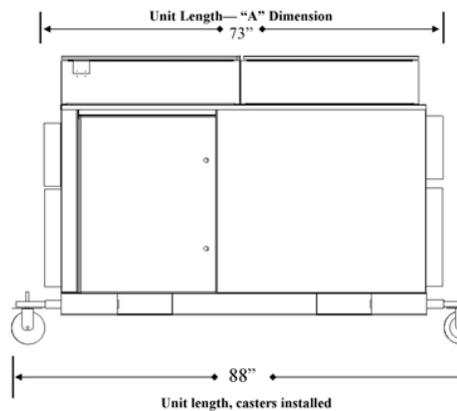

- Simple maintenance
- Very dry air can be achieved

Model	Static Pressure External	Moisture Removal Lbs/Hr 80°/ 60% RH	Moisture Removal Gallons/Day 80°/ 60% RH	Moisture Removal Lbs/Hr 55°/ 80% RH	Moisture Removal Gallons/Day 55°/ 80% RH	Moisture Removal Lbs/Hr 40°/ 80% RH	Moisture Removal Gallons/Day 40°/ 80% RH
DDH-3000	2.5 in wg	85	254	73	210	50	144

Model	Air Volume	Electric Reactivation Load 220/1/60	Electric Reactivation FLA Load 460/3/60	Gas Reactivation FLA Load 460/3/60	CFH Gas Max Usage LP	Gallon/HR Max Usage LP
DDH-3000	3,000	N/A	68	N/A	N/A	N/A